



DIGITAL LINE VOLTAGE POINT TO POINT WIRING DIAGRAM

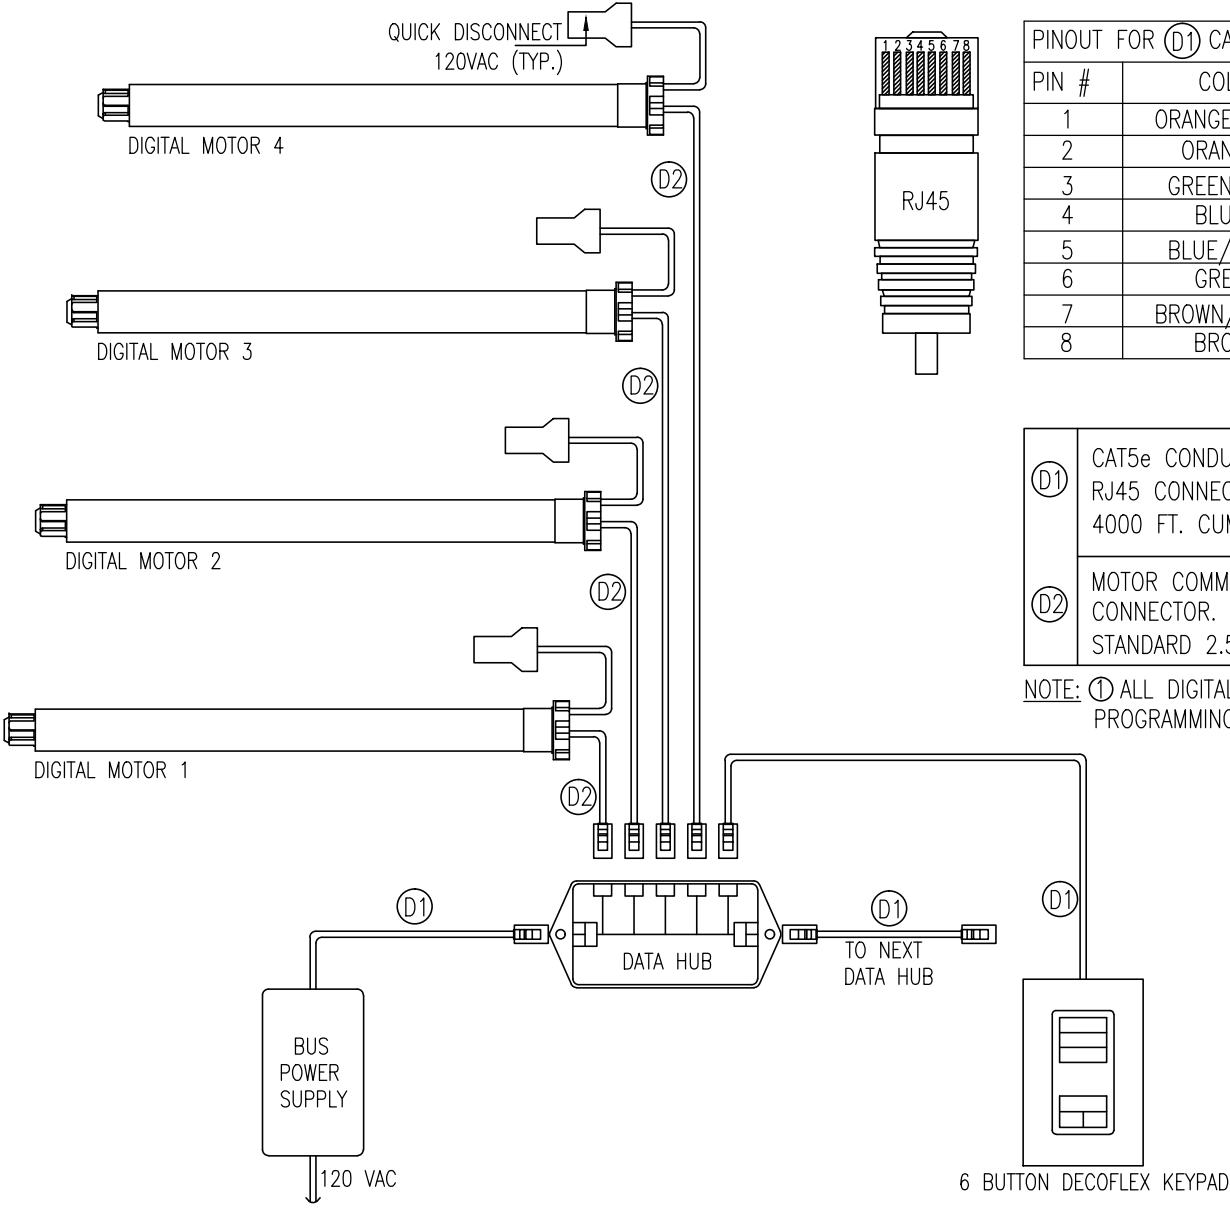

PINOUT FOR D1 CABLE		
PIN #	COLOR	PINOUT
1	ORANGE/WHITE	DATA+
2	ORANGE	DATA-
3	GREEN/WHITE	N/A
4	BLUE	POWER+
5	BLUE/WHITE	POWER+
6	GREEN	POWER+
7	BROWN/WHITE	GROUND-
8	BROWN	GROUND-

D1	CAT5e CONDUCTORS, TWISTED STRANDED WITH RJ45 CONNECTORS. TIA/EIA 568B. MAX DISTANCE 4000 FT. CUMMALATIVE (BY OTHERS)
D2	MOTOR COMMUNICATION CABLE WITH RJ45 CONNECTOR. 4 CONDUCTOR FLAT MODULAR STANDARD 2.5FT. (MAX DISTANCE 30FT.)

NOTE: ① ALL DIGITAL MOTORS AND SWITCHES WILL REQUIRE PROGRAMMING FOR PROPER OPERATION

	TITLE	DWN BY	CKD BY
	DIGITAL LINE VOLTAGE POINT TO POINT WIRING DIAGRAM	N.W.	M.P.
		DWG NO.	DATE
		WPDH-M	02/02/2017
		SCALE	SHEET NO.
	N.T.S.	1 OF 1	