


RTS LINE VOLTAGE WIRING DIAGRAM

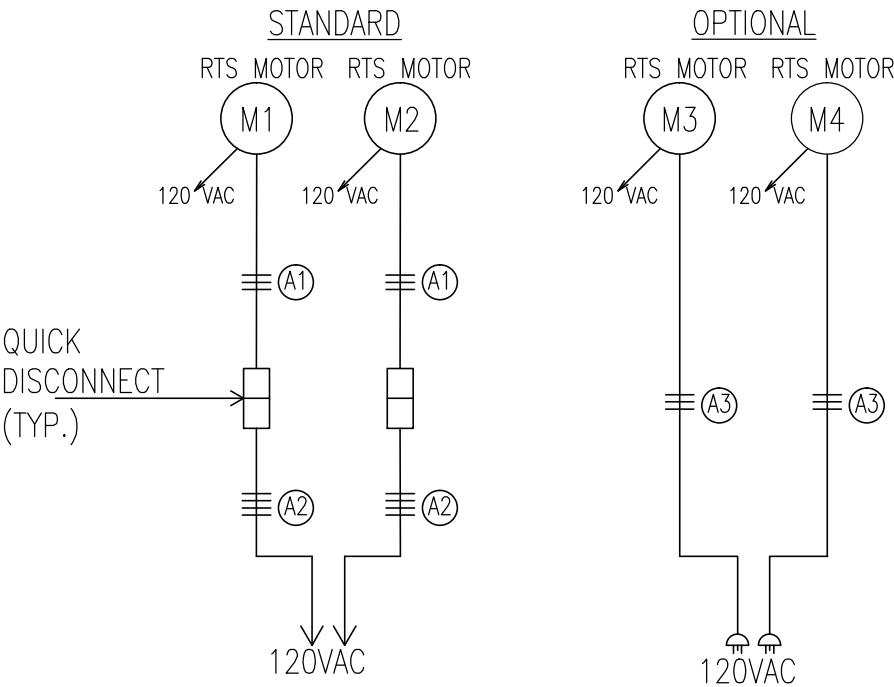

STANDARD		OPTIONAL
A1	4 CONDUCTOR 16 AWG STRANDED MOTOR LEAD WITH ANDERSON QUICK DISCONNECT(MALE) STANDARD 1 FT. NOTE: RED IS NOT USED.	120V AC POWER CABLE (3 CONDUCTORS) 16 AWG STRANDED FOR 3 PRONG PLUG PART#:MLRTS-1/0-6 (STANDARD LENGTH 6")
A2	4 CONDUCTOR 16 AWG STRANDED J-BOX WITH ANDERSON QUICK DISCONNECT(FEMALE) STANDARD 5 FT. NOTE: RED IS NOT USED.	
A3		

NOTE: ① SEE RTS CONTROLS AND RTS POWER OPTIONS FOR ADDITIONAL INFORMATION
NOTE: ② POWER MAY BE DAISY-CHAINED UP TO CIRCUIT CAPACITY.

	TITLE	RTS LINE VOLTAGE WIRING DIAGRAM		DWN BY	CKD BY
				N.W.	M.P.
				DWG NO. WDRH-S	DATE 02/02/2017
				SCALE N.T.S.	SHEET NO. 1 OF 1