
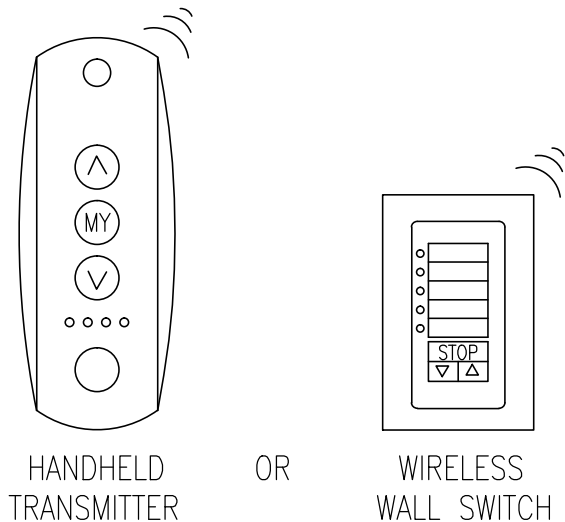



RTS LINE VOLTAGE POINT TO POINT WIRING DIAGRAM

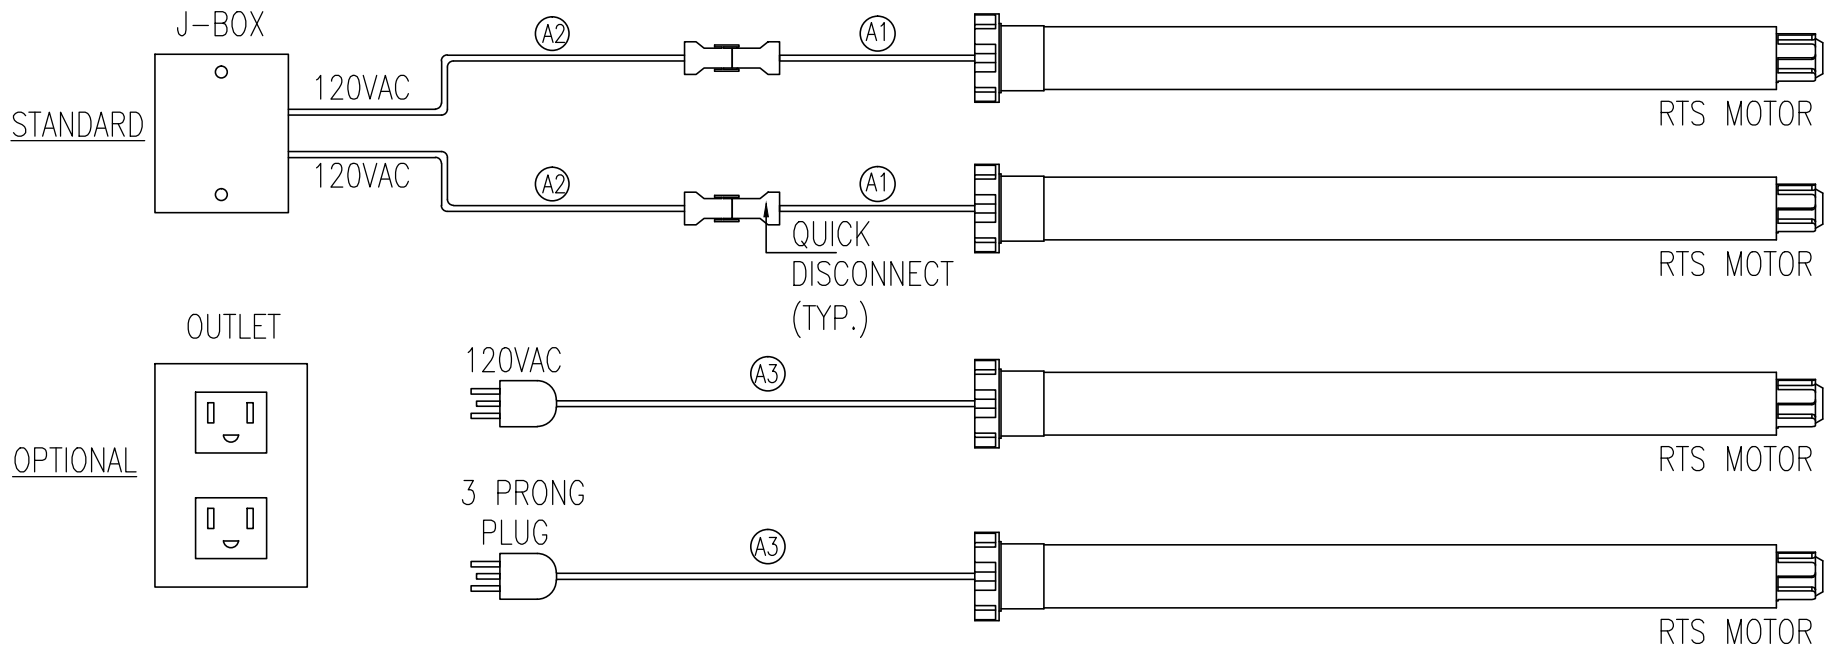

STANDARD		OPTIONAL
A1	4 CONDUCTOR 16 AWG STRANDED MOTOR LEAD WITH ANDERSON QUICK DISCONNECT(MALE) STANDARD 1 FT. NOTE: RED IS NOT USED.	
A2	4 CONDUCTOR 16 AWG STRANDED J-BOX WITH ANDERSON QUICK DISCONNECT(FEMALE) STANDARD 5 FT. NOTE: RED IS NOT USED.	
A3		120V AC POWER CABLE (3 CONDUCTORS) 16 AWG STRANDED FOR 3 PRONG PLUG PART#:MLRTS-1/O-6 (STANDARD LENGTH 6')

NOTE: ① SEE RTS CONTROLS AND RTS POWER OPTIONS FOR ADDITIONAL INFORMATION

NOTE: ② POWER MAY BE DAISY-CHAINED UP TO CIRCUIT CAPACITY.

	TITLE	RTS LINE VOLTAGE POINT TO POINT WIRING DIAGRAM		DWN BY	CKD BY
				N.W.	M.P.
				DWG NO.	DATE
				WPRH-S	02/02/2017
				SCALE	SHEET NO.
				N.T.S.	1 OF 1