




WT Shade®
Commercial Window Treatments
 24X | 1%, 3% and 5% Openness

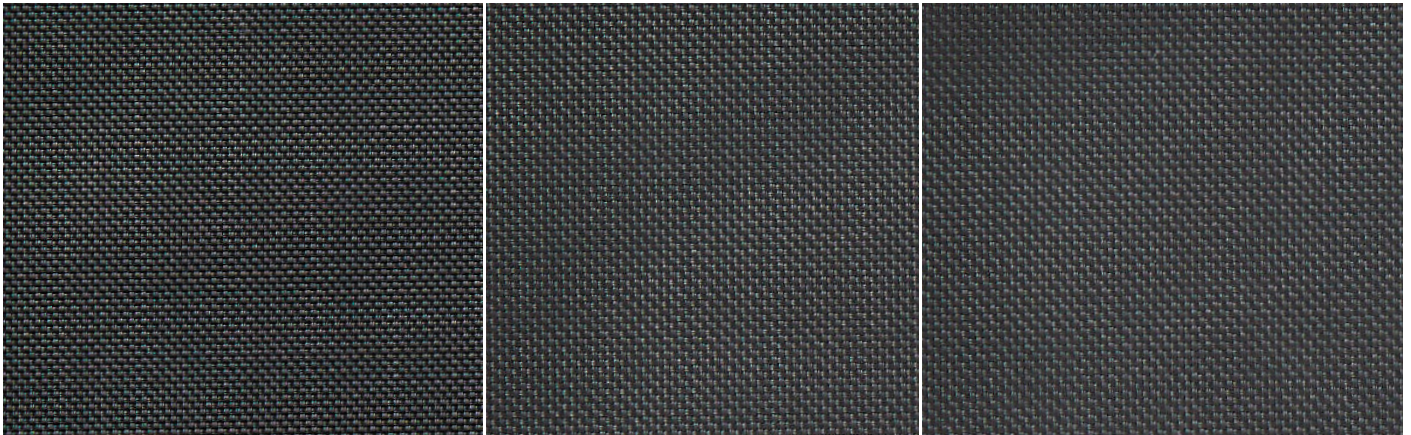

241 | 1%


-90 Black

243 | 3%

-90 Black

245 | 5%

-90 Black

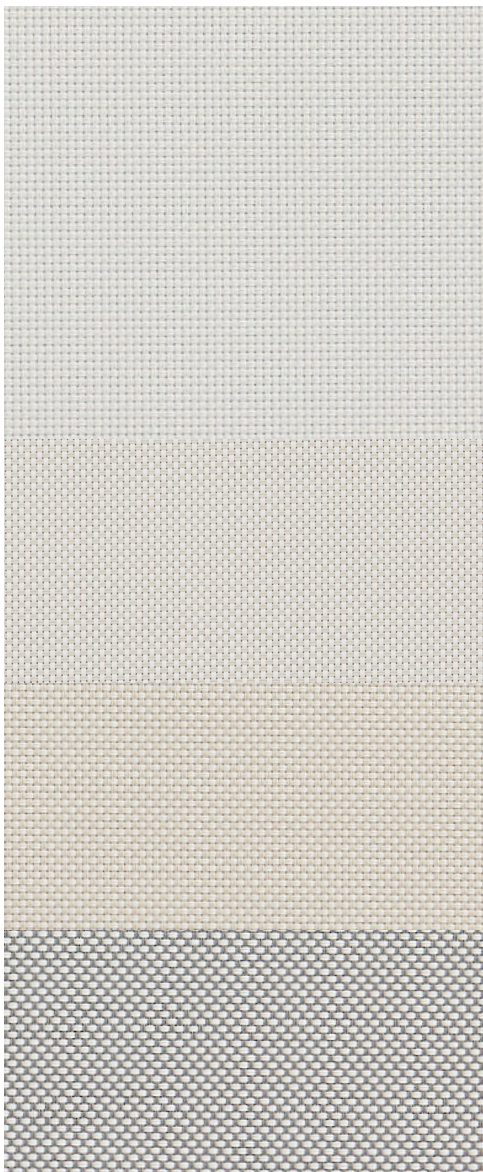


-10 White

-16 White/Haze

-12 White/Sand

-18 White/Grey

Fabrics sampled in 3% Openness

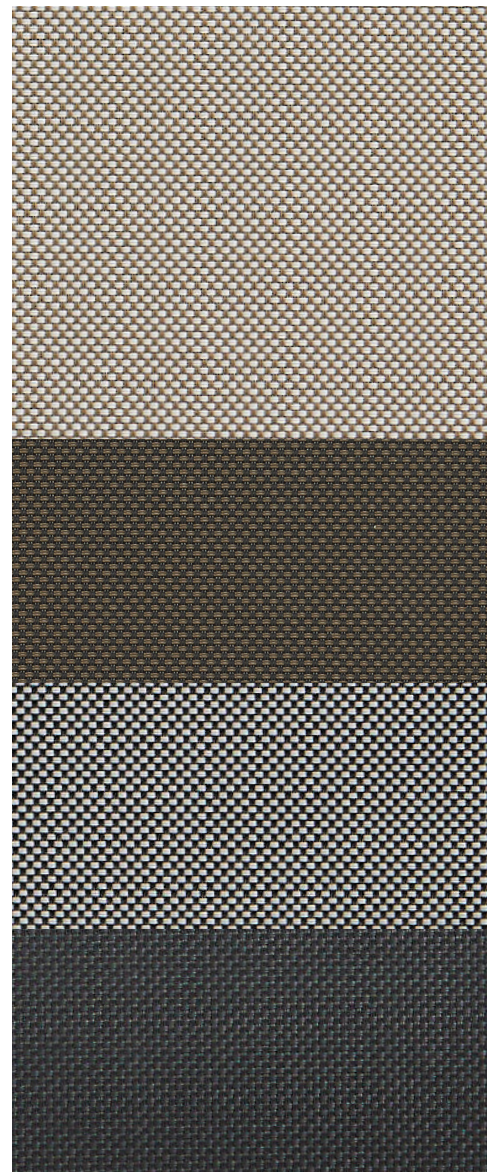

-38 Sand Mocha

-57 French Roast


-89 Grey/Black

-90 Black

Fabrics sampled in 3% Openness

WT Shade® Commercial Window Treatments

24X | 1%, 3% and 5% Openness

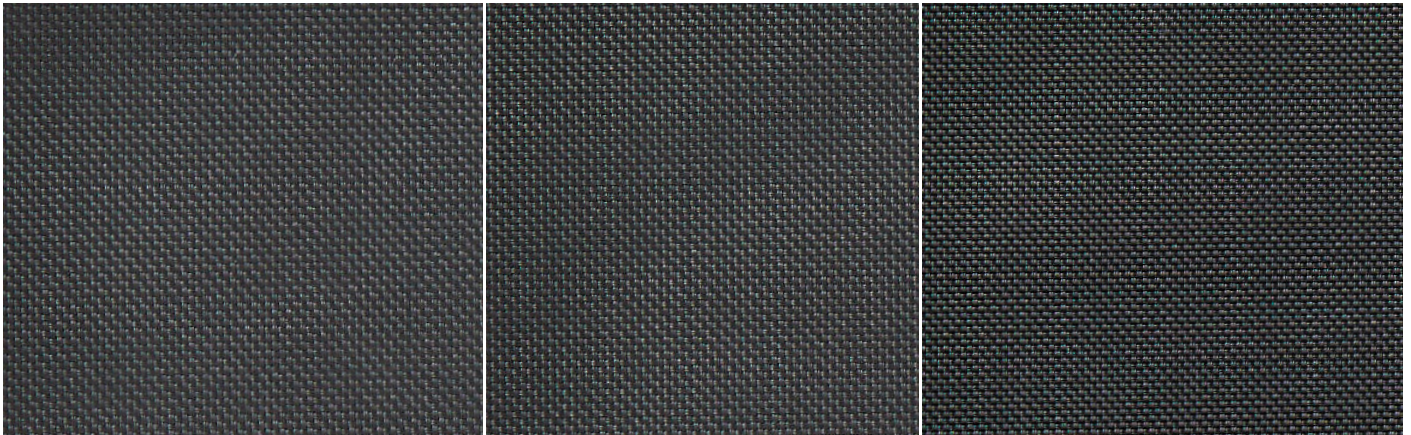

Protecting against the harmful effects of the sun can be challenging, but WT 24X fabrics are the one-stop fabric answer. These robust, 2x2 basket weaves are available in a variety of openness and colors allowing you to mix and match openness factors in the same space with a classically textured finish.

Specifications and Certifications			
Fabric:	241	243	245
Width:	98", 118"	98", 118"	98", 118"
Composition:	22% Polyester/ 78% PVC		
Openness Factor:	1%	3%	5%
UV Blockage:	99%	97%	95%
Weight (OZ/YD ²):	15.04	13.71	12.68
Thickness (IN):	0.025	0.024	0.024
Fire Classification:	NFPA 701:2015 (TEST 1 SMALL SCALE)		
Air Quality Certification:	GREENGUARD and GREENGUARD GOLD		
Lead-Free:	ASTM E1645/RoHS		
Antimicrobial:	ASTM G21, ASTM E2180		
Environmental Certification:	OEKO-TEX 100		



Fabrics may vary slightly from colors of shown samples. Variances in fabric color are a normal part of fabric production as color mixtures may be slightly different from dye lot to dye lot.

For documentation of test results and certificates please visit inpro.com/wtshade.

For 8 x 10 memo samples of any of the fabrics featured on this card, please contact your WT Shade representative or visit inpro.com/wtshade.

CLEANING INSTRUCTIONS: Regular dusting and vacuuming recommended. For more thorough cleaning, use mild detergent and water, then rinse with water and allow to air dry. Spot test any cleaners before use. Do not bleach. Professional cleaning recommended.

© Inpro Corporation

S80 W18766 Apollo Drive
Muskego, Wisconsin 53150 USA
inpro.com/wtshade
877.294.3580